


# Matrix™

## 2380 Strip Cut & Place System

Up to 30  
parts/min\*

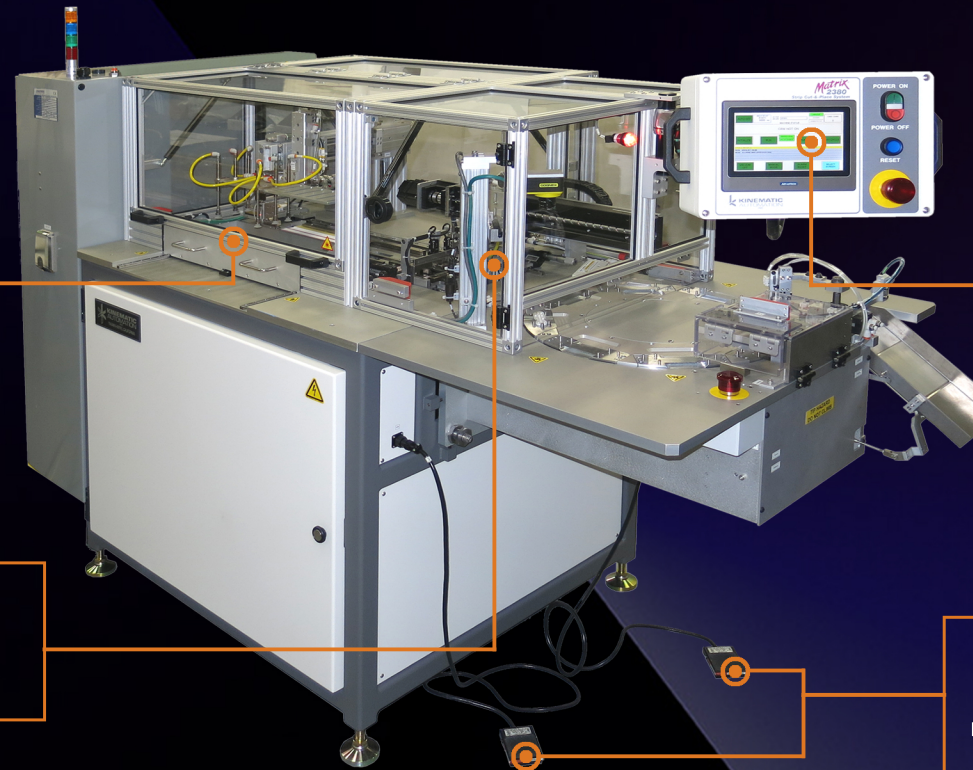

**Material Infeed**  
Can process various laminated  
card widths & lengths

**Programmable HMI**  
Setup product parameters  
Call up recipes

**Reject Management**  
Automatic reject mark  
detection & strip removal

**Cycle Footswitches**  
The machine can run in full auto  
mode or manual cycle by footswitch

**Warranty: 12 Months**

The semi automatic *Matrix 2380* is a flexible cassette assembly system. A variety of cassettes can be run with the purchase of change-out kits.

[Request a Quote](#)

\* operator dependent

# Matrix™

## 2380 Strip Cut & Place System

### Capacities

- Card dimensions min: 3.8 cm W x 21.59 cm L
- Card dimensions max: 15.24 cm W x 47 cm L
- Strip cutting width: 3.5 mm to 8 mm
- Material thickness: 0.3 cm max

### Performance

- Machine cycle time: 30 cycles/minute

### Facilities Requirements

- Power 208/230 VAC, single phase, 50/60 Hz, 10 A
- Process air 140 lpm @ 6 bar

### Dimensional Specifications (approx.)

- Size: 96 cm W x 220 cm D x 160 cm H
- Weight: 540 kg



### Key Features


- Multiple products can be processed
- Automatic card feed magazine
- Automatic strip cut pick and place
- Automatic card trim and scrap removal
- Automatic reject management
- Automatic cartridge closure
- Automatic offload
- Processes multiple products
- Proven guillotine style cutting technology
- Strip width & length flexibility
- Touch screen control

### Options


- Feature registered cutting
- Vision inspection for correct strip placement
- Change-out kits for multiple products



*Load card material  
on the fly*

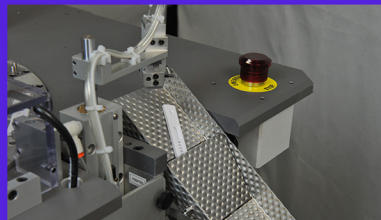

*Automatically  
discards rejects*

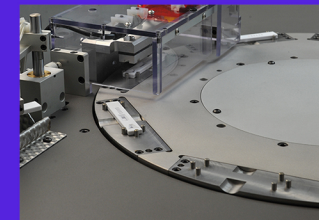

*Quick change pallets  
to run various products*



Specifications subject to change without notice